

Safety-Loc[®] SLP

VEHICLE RESTRAINT SPECIFICATIONS

SLP-3000 HYDRAULIC RECESSED RESTRAINT



Design Highlights



- Recessed, Pit Mounted Design
- Steel NEMA 12 Control Panel (Interlock Capable)
- Non-Impact, Hydraulic Activation
- Programmable Logic Controller (PLC)
- Automatic Interior & Exterior LED Light Communication System
- Horizontal Hooking Range 4 - 14" From Dock Face
- Vertical Hooking Range: 9 - 28"
- Compatible with NHTSA Regulation Rear Impact Guards
- Advanced Safe Engagement Signaling
- Auto Restore (if no rear impact guard)

Project Information

Job Name _____
 Address _____
 General Contractor _____
 Distributor _____
 Quantity _____

Certified For Construction

By _____
 Company _____
 Address _____
 Date _____



Available Options

- Single Phase Power
- Audible Alarm
- Key Lock Switch on Control Panel
- Exterior Controls
- Pit Cover _____ (Specify VSL or Pit Leveler)
- 120V High Visibility Traffic Light
- Other _____

Available Accessories

- Master Control Panel™
- Combination Control Panel
- Other _____




Safety-Loc[®] SLP

VEHICLE RESTRAINT SPECIFICATIONS

SLP-3000 HYDRAULIC RECESSED RESTRAINT

- 1. General:** Safety-Loc[®], "SLP-3000" series pit-mounted, hydraulic recessed vehicle restraint featuring push-button control and rear impact guard safe engagement signaling system. Includes locking unit, LED interior & exterior communication light system, and push-button control panel. Unit conforms to OSHA standards.
- 2. Construction:** Main frame steel structure to be pit mounted. Unit to have a resistance to pull-out of 32,000 lbs.
- 3. Operation:** As a vehicle backs into position, the exterior light is green and the interior light is red. When the vehicle is in position, the operator presses the "ENGAGE" button. The interior light remains red while the exterior light instantly switches to red. The hydraulic hook lowers and extends from the pit then raises until contact is made with the rear impact guard, then retracts until the restraint senses positive engagement with the rear impact guard. Once positively engaged, the inside light switches to green. The hook maintains positive engagement throughout loading/unloading, preventing horizontal movement away from the dock. To release the vehicle, the operator presses the "RESTRAINT RELEASE" button on the control panel, returning the restraint to its storage position inside the pit. The interior light immediately changes to red signaling it is unsafe to load/unload. When the restraint is fully restored, the exterior light switches to green, signaling it is safe for the vehicle to leave. If the restraint is unable to engage the rear impact guard, it automatically returns to its stored position, sounding an optional audible alarm, and flashes the inside red and amber light. The outside light will remain red. If the vehicle is not engaged, the operator must manually chock the wheels and rotate the control panel selector switch to "RESTRAINT OVERRIDE" mode. The exterior light is red, interior light switches to green and an amber light indicates that the vehicle is secured by alternate means. To release the vehicle, the operator presses the "RESTRAINT RELEASE" button on the control panel, switching the outside light to green indicating it is safe for the vehicle to leave and the inside light to red indicating to the dock worker that it is not safe to load / unload.
- 4. Control Panel:** Solid state control panel (14"W x 16"H x 8"D) features a programmable logic controller (PLC) and "real time" diagnostic capability, industrial quality push-buttons, integral LED visual safety light warning system and printed operational instructions.
- 5. Hooking Range:** The vehicle restraint will engage a rear impact guard 9" to 28" vertically from the driveway. The hydraulically controlled activation system limits vehicle movement and engages rear impact guards positioned up to 14" from the dock face and is compatible with NHTSA regulation rear impact guards.
- 6. Exterior Lights:** Low profile, compact exterior light (6-3/8"W x 11-3/8"H x 4"D) with flashing green and red LED signals to indicate safe or unsafe conditions for vehicle movement. Caution sign (9"W x 24"H) with standard and reversed lettering provided.
- 7. Electrical:** Control panel for lock unit is available in all single and three phase voltages. Interior and exterior LED lights operate on a 24 volt circuit. All components are UL approved.
- 8. Installation:** Requires mounting of locking unit, control panel, exterior lights and caution sign in strict accordance with Serco installation instructions. Pan may ship separate from restraint. Pit style dock levelers used with this restraint require 24" pit depth. Locking unit and exterior lights to be electrically installed by others. Installation is recommended to be performed only by authorized Serco Distributors. Installation is not included unless specifically contracted with Serco Distributor.
- 9. Limited Warranty:** Serco warrants all components to be free of defects in material and workmanship, under normal use, for a 1-year base period from date of shipment in accordance with Serco's Standard Warranty Policy. The "Base Warranty Period" will begin on the completion of installation or the sixtieth (60th) day after shipment, whichever is earlier.

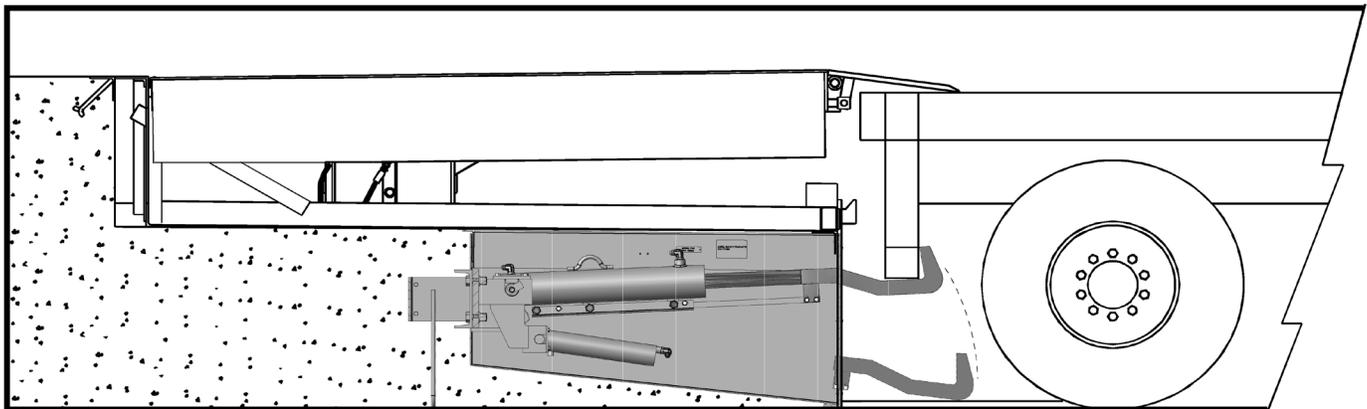

SERCO[®]