



# FOAM DOCK SEAL WITH HEAD PAD

## DOCK SEAL SPECIFICATIONS

MODEL S600

The Serco S-600 Stationary Head Pad Dock Seal is ideal for smaller doors (9 ft. wide x 9 ft. or less). The S-600 seals automatically as the trailer is backed against the foam pads.



### Design Highlights

- Roll-formed Galvanized Steel Framing Warranted for 5 Years Against Rotting, Splitting or Cracking.
- Endurance-tested Foam Core is Continuously Bonded to Frame Surface with Flexible, Non-Flammable Adhesive.
- A Wide Selection of Durable Coated Fabrics Provide Maximum Durability.
- Highly Resilient, Open-celled Polyurethane Foam Keeps Original Shape and Compresses Easily to Extend Seal Life.
- All Pads are Vented for Air and Moisture Release.
- Side Pad Bottoms are Tapered to Avoid Pinching and Wear.
- Full Length Yellow Stripes Guide Drivers to the Dock.

### Project Information

Job Name \_\_\_\_\_

Address \_\_\_\_\_

General Contractor \_\_\_\_\_

Distributor \_\_\_\_\_

Model \_\_\_\_\_ Quantity \_\_\_\_\_

### Certified For Construction

By \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_


Date \_\_\_\_\_



# FOAM DOCK SEAL WITH HEAD PAD

## DOCK SEAL SPECIFICATIONS

MODEL S600

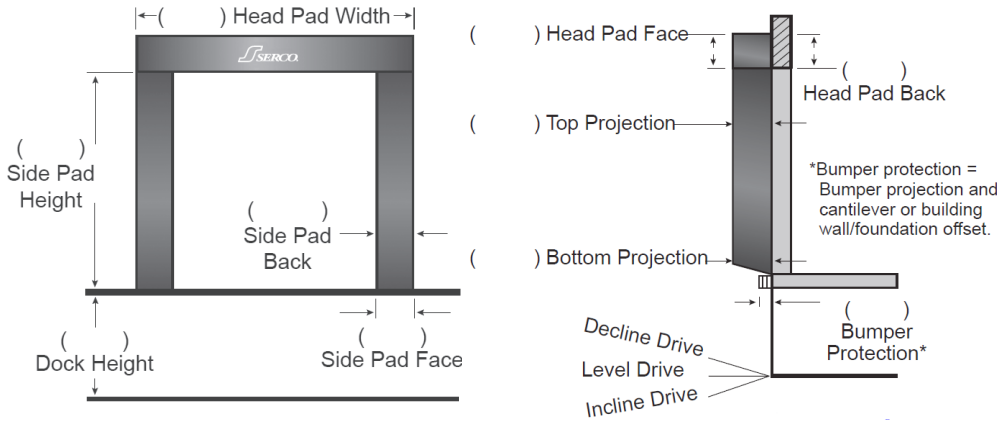

### APPLICATION DATA

Door Width: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Door Height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Dock Height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Bumper Protection\*: \_\_\_\_\_ in.  
 (\*Includes bumper projection and any building wall/foundation offset or cantilever)

### TRUCKS AND TRAILERS SERVICED

Width: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Height: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Length: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Hydraulic Tailgate:  Yes  No  
 Rear Step Section:  Yes  No  
 Tailgate/Step Section Size: \_\_\_\_\_ In.  
 Yard Jockeys:  Yes  No

### QUANTITY \_\_\_\_\_

Head Pad Width \_\_\_\_\_"

Head Pad Back/Face  12/12  18/18  24/24  12/15  12/18

Drop Curtain  None  12"  18"  24"  Hook-loop  No hook-loop  Full Width

Side Pad Height \_\_\_\_\_"

Side Pad Back/Face  6/10  8/12  10/12  12/12  12/15  8/15  6/14  10/18  8/23

Base Material  22oz Vinyl  40oz Vinyl  40oz CSM  XL-100™

Color  Black  Tan  Brown  Blue  Green

Taper  Yes  No

Top Projection  10"  12"  14"  16"  18"  20"  22"  \_\_\_\_\_"

Bottom Projection  10"  12"  14"  16"  18"  20"  22"  \_\_\_\_\_"

Blockout  None

Blockout Projection  2"  4"  6"  8"  10"  12"  \_\_\_\_\_"

Wear Pleats  None  4"  8"  16"  Head and Side Pads  Head Pad Corners Only

22oz Vinyl  40oz Vinyl  40oz CSM  XL-100™  Black  Tan  Brown  Blue  Green

Wear Face  None  Head Pad  Side Pad

22oz Vinyl  40oz Vinyl  40oz CSM  XL-100™  Black  Tan  Brown  Blue  Green

Reinforced Inside Face  None  Side Pad 4"  Side Full Height

22oz Vinyl  40oz Vinyl  40oz CSM  XL-100™  Black  Tan  Brown  Blue  Green

Options Bottom Flap Size:  3"  6"  \_\_\_\_\_" Bottom Flap Location:  Inside  Inside Front  All Sides

Door Numbers  Door Numbers  24" Guide Stripes  Flame Retardant Fabric Only  Flame Retardant Foam Only

Side Pad Mounting Brackets  Flats & Angles  Angles

1 1/2" Offsets & Angles

\*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)

\*Note: Consult factory for blockout application assistance.

