

## Product Summary

The Serco Ironside IDS-HC Head Curtain Dock Seal features the exclusive UHWR fabric with up to 10 times the abrasion resistance of competitive fabrics tested. It is specifically designed to handle air ride suspension trailers, intermodal trailers, sharp edges and yard spotters.

## Design Highlights

- Exclusive UHWR™ (Ultra High Wear Resistant) fabric provides superior abrasion resistance
- Exclusive EFC (Encapsulated Foam Chambers) Head Curtain with 1" x 3" chambers provides superior sealing on trailer top, compared to standard head curtains
- Integrated pull rope system allows full adjustability to varying trailer heights.
- Exclusive heat-sealed, full length, yellow guide stripes
- Exclusive roll-formed, galvanized steel framing
- Endurance-tested foam core is continuously bonded to frame surface with flexible, non flammable adhesive
- Top of hood is tapered forward and securely fastened to building wall
- Fiberglass stays add stiffness to hood top to prevent sagging
- Hood curtain splits offer load relief and higher clearance
- Highly resilient, open-celled polyurethane foam keeps original shape and compresses easily to extend seal life
- Side pad bottoms are tapered to avoid pinching and wear
- All pads are vented for air and moisture release



## Project Information

Job Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 General Contractor \_\_\_\_\_  
 Distributor \_\_\_\_\_  
 Quantity \_\_\_\_\_



## Certified For Construction

By \_\_\_\_\_  
 Company \_\_\_\_\_  
 Address \_\_\_\_\_  
 Date \_\_\_\_\_

# IRONSIDE™ DOCK SEAL

## WITH HEAD CURTAIN MODEL IDS-HC

### DOCK SEAL SPECIFICATIONS

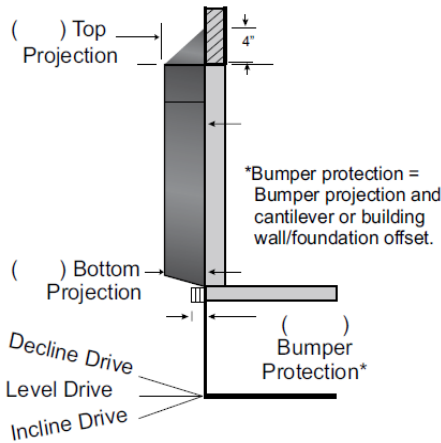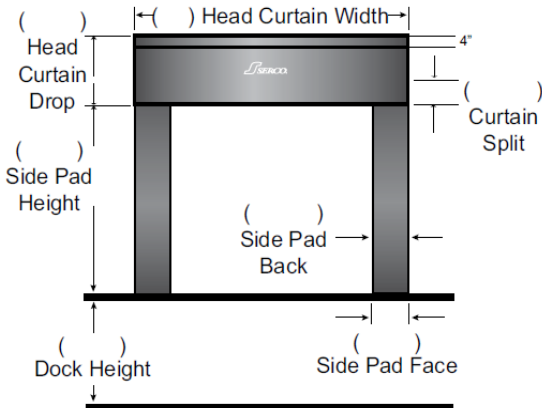

#### APPLICATION DATA

Door Width: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Door Height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Dock Height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Bumper Protection\*: \_\_\_\_\_ in.  
 (\*Includes bumper projection and any building wall/foundation offset or cantilever)

#### TRUCKS AND TRAILERS SERVICED

Width: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Height: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Length: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Hydraulic Tailgate:  Yes  No  
 Rear Step Section:  Yes  No  
 Tailgate/Step Section Size: In.  
 Yard Jockeys:  Yes  No

**QUANTITY** \_\_\_\_\_

**Drop Curtain**  None  12"  18"  24"  Velcro Strips  Full Width

**Side Pad Height** \_\_\_\_\_ (Total Inches)

**Side Pad Back/Face**  12/12  6/10  8/12  10/12  10/15  8/15  12/15  10/18  6/14

**Base Material** 22 oz. Black Vinyl Standard

**Taper**  Tapered  Non-Tapered

**Top Projection**  8"  10"  12"  14"  16"  18"  20"  22"  24"

**Bottom Projection**  8"  10"  12"  14"  16"  18"  20"  22"  24"

**Bottom Flaps** 3" Inside Standard

**Blockout**  None  Top Projection \_\_\_\_\_"  Bottom Projection \_\_\_\_\_"

**Wear Face** Full Height Side Pad & Full Width Head Pad with UHWR Fabric Standard, Black

**Reinforced Inside Face** Full Height Side Pad with UHWR Fabric Standard, Black

**Bottom Flaps** 3" Inside Standard

**Options**  Door Numbers

**Side Pad Mounting Brackets**  None  Flats & Angles  Angles  1 1/2" Offset Flats & Angles

\*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)

\*Note: Consult factory for blockout application assistance.